

# DATA SHEET



**MPSA56**

**PNP general purpose transistor**

Product specification  
Supersedes data of 1998 Jul 21

1999 Apr 27

# PNP general purpose transistor

# MPSA56

### FEATURES

- Low current (max. 500 mA)
- Low voltage (max. 80 V).

### APPLICATIONS


- General purpose switching and amplification.

### DESCRIPTION

PNP transistor in a TO-92; SOT54 plastic package.  
NPN complement: MPSA06.

### PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | collector   |
| 2   | base        |
| 3   | emitter     |

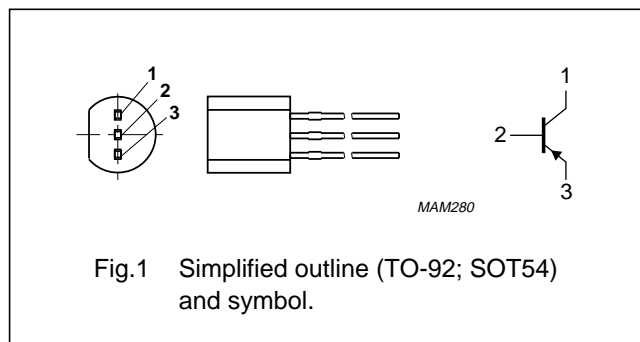

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL    | PARAMETER                     | CONDITIONS                                       | MIN. | MAX. | UNIT             |
|-----------|-------------------------------|--|------|------|------------------|
| $V_{CBO}$ | collector-base voltage        | open emitter                                     | –    | –80  | V                |
| $V_{CEO}$ | collector-emitter voltage     | open base  | –    | –80  | V                |
| $V_{EBO}$ | emitter-base voltage          | open collector                                   | –    | –5   | V                |
| $I_C$     | collector current (DC)        |  | –    | –500 | mA               |
| $I_{CM}$  | peak collector current        |  | –    | –1   | A                |
| $I_{BM}$  | peak base current             |  | –    | –200 | mA               |
| $P_{tot}$ | total power dissipation       | $T_{amb} \leq 25\text{ }^\circ\text{C}$ ; note 1 | –    | 625  | mW               |
| $T_{stg}$ | storage temperature           |  | –65  | +150 | $^\circ\text{C}$ |
| $T_j$     | junction temperature          |  | –    | 150  | $^\circ\text{C}$ |
| $T_{amb}$ | operating ambient temperature |  | –65  | +150 | $^\circ\text{C}$ |

### Note

1. Transistor mounted on an FR4 printed-circuit board.

## PNP general purpose transistor

## MPSA56

## THERMAL CHARACTERISTICS

| SYMBOL        | PARAMETER                                   | CONDITIONS | VALUE | UNIT |
|---------------|---|------------|-------|------|
| $R_{th\ j-a}$ | thermal resistance from junction to ambient | note 1     | 200   | K/W  |

## Note

1. Transistor mounted on an FR4 printed-circuit board.

## CHARACTERISTICS

$T_j = 25\text{ °C}$  unless otherwise specified.

| SYMBOL      | PARAMETER                            | CONDITIONS   | MIN. | MAX. | UNIT |
|-------------|--------------------------------------|--|------|------|------|
| $I_{CBO}$   | collector cut-off current            | $I_E = 0; V_{CB} = -80\text{ V}$                                 | –    | –50  | nA   |
| $I_{EBO}$   | emitter cut-off current              | $I_C = 0; V_{EB} = -5\text{ V}$                                  | –    | –50  | nA   |
| $h_{FE}$    | DC current gain                      | $I_C = -10\text{ mA}; V_{CE} = -1\text{ V}$                      | 100  | –    |      |
|             |                                      | $I_C = -100\text{ mA}; V_{CE} = -1\text{ V}$                     | 100  | –    |      |
| $V_{CEsat}$ | collector-emitter saturation voltage | $I_C = -100\text{ mA}; I_B = -10\text{ mA}$                      | –    | –250 | mV   |
| $V_{BE}$    | base-emitter voltage                 | $I_C = -100\text{ mA}; V_{CE} = -1\text{ V}$                     | –    | –1.2 | V    |
| $f_T$       | transition frequency                 | $I_C = -100\text{ mA}; V_{CE} = -1\text{ V}; f = 100\text{ MHz}$ | 50   | –    | MHz  |

PNP general purpose transistor

MPSA56

PACKAGE OUTLINE

Plastic single-ended leaded (through hole) package; 3 leads

SOT54



DIMENSIONS (mm are the original dimensions)

| UNIT | A          | b            | b <sub>1</sub> | c            | D          | d          | E          | e    | e <sub>1</sub> | L            | L <sub>1</sub> <sup>(1)</sup> |
|------|------------|--------------|----------------|--------------|------------|------------|------------|------|----------------|--------------|-------------------------------|
| mm   | 5.2<br>5.0 | 0.48<br>0.40 | 0.66<br>0.56   | 0.45<br>0.40 | 4.8<br>4.4 | 1.7<br>1.4 | 4.2<br>3.6 | 2.54 | 1.27           | 14.5<br>12.7 | 2.5                           |

Note

1. Terminal dimensions within this zone are uncontrolled to allow for flow of plastic and terminal irregularities.

| OUTLINE VERSION | REFERENCES |       |       | EUROPEAN PROJECTION | ISSUE DATE |
|-----------------|------------|-------|-------|---------------------|------------|
|                 | IEC        | JEDEC | EIAJ  |                     |            |
| SOT54           |            | TO-92 | SC-43 |                     | 97-02-28   |

## PNP general purpose transistor

## MPSA56

**DEFINITIONS**

|   |   |
|---|---|
| <b>Data sheet status</b>  |   |
| Objective specification   | This data sheet contains target or goal specifications for product development.       |
| Preliminary specification   | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification   | This data sheet contains final product specifications.                                |
| <b>Limiting values</b>  |   |
| Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability. |   |
| <b>Application information</b>  |   |
| Where application information is given, it is advisory and does not form part of the specification.   |   |

**LIFE SUPPORT APPLICATIONS**

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.